

[illegible]

Technical drawing of a circular mechanical component, likely a pressure vessel or tank, showing dimensions and labels.

Dimensions:


- Overall width: 187.90
- Overall height: 155.50
- Internal width: 192.90
- Internal height: 160.50
- Top flange thickness: 24.10
- Top flange inner radius: 29.10
- Top flange outer radius: 65.55
- Top flange inner diameter: 70.55
- Top flange outer diameter: 76.16
- Top flange inner radius (bottom): 71.16
- Top flange outer radius (bottom): 76.16
- Top flange inner diameter (bottom): 80.17
- Top flange outer diameter (bottom): 85.17
- Top flange inner radius (bottom): 108.70
- Top flange outer radius (bottom): 113.70
- Top flange inner diameter (bottom): 119.68
- Top flange outer diameter (bottom): 124.68

Labels:

- AB
- SSO COBRE
- RA 6.45-6.55
- CE
- E - CONECTOR CALIBRA X 15.00
- D - CONECTOR CALIBRA

E-CONECTOR DE SUCCAO COBRE
CALIBRAR Ø INT. PARA 8.00-8.10
X 15.00-17.00 DE PROF.

- D-CONECTOR DE DESCARGA COBRE
CALIBRAR Ø INT. PARA 6.45-6.55
X 13.00-15.00 DE PROF. €

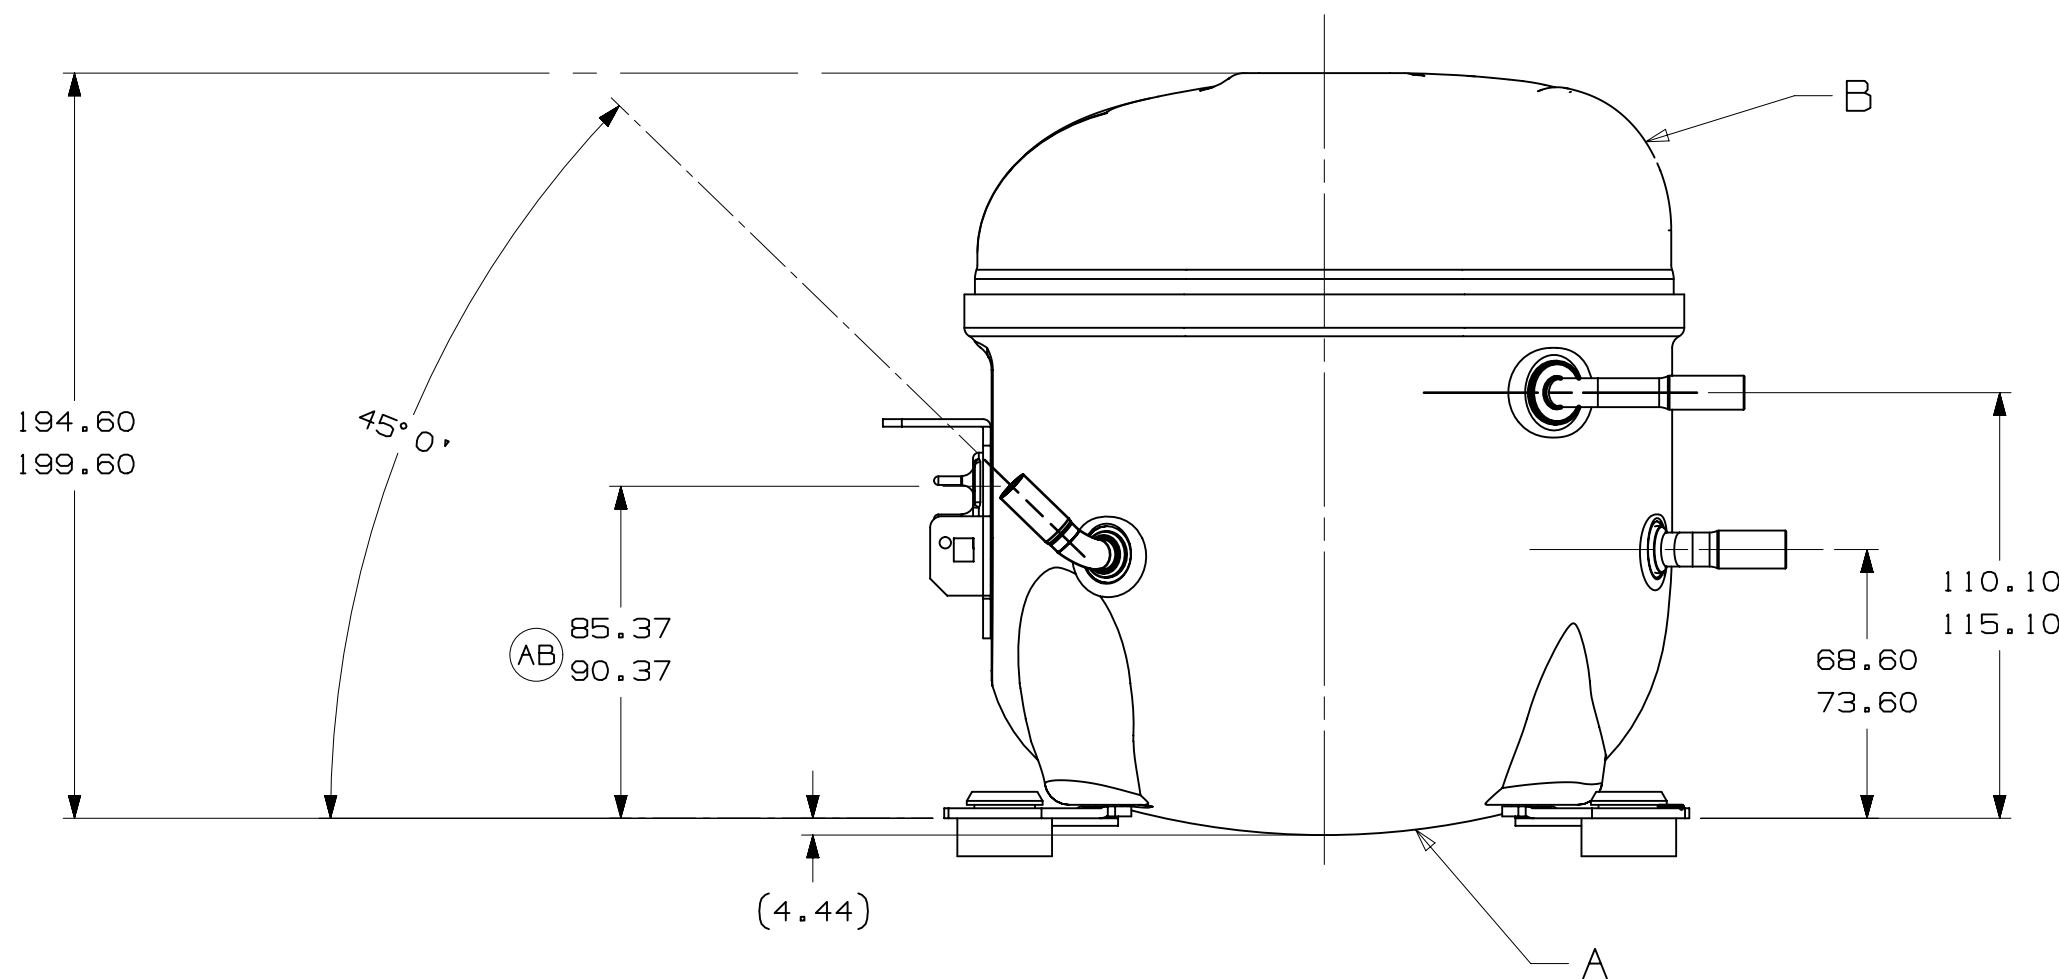

NOTAS:

- 1- SE ESPECIFICADO NA LISTA DE MATERIAL, MONTAR AS PECAS CONFORME MOSTRADO.
- 2- VER ESPECIFICACAO "A-B" E "A-C" PARA PROCESSO.
- 3- NAO PODE HAVER VINCOS NOS TUBOS (VINCOS SAO SINAIS OU MARCAS QUE FICAM EM ALGO QUE SE DOBRA).
- 4- APOS AS DOBRAS NOS TUBOS, NAO PODE HAVER REDUCAO DE AREA SUPERIOR A 30%.
- 5- OS TUBOS DE SUCCAO, DESCARGA E PROCESSO DEVEM ESTAR ISENTOS DE TINTA EM 15,8mm (5/8") A PARTIR DO TOPO DOS TUBOS CONFORME ESPEC. TECUMSEH A-B4.
6. VER ESPECIFICACAO TECUMSEH GLOBAL 8 PARA EXIGENCIAS DE FORNECEDORES REFERENTES A REGULAMENTACOES AMBIENTAIS.

PROJECÃO: 3°DIEDRO  UNIDADE: mm FORMATO: A2		 	
SÍMBOLOS Q.A. CONFORME PROCEDIMENTO 2.01.031 TECUMSEH DO BRASIL		NOME: COMPRESSOR PARA VENDAS NUMERO: DCAE707	
★ : CATEGORIA I ▲ : CATEGORIA II ■ : CATEGORIA III □ : CATEGORIA IV		ESCALA: 1:2 FOLHA: 1/1	
DATA: 19-10-20		REF.: FAMILIA: AE2	