
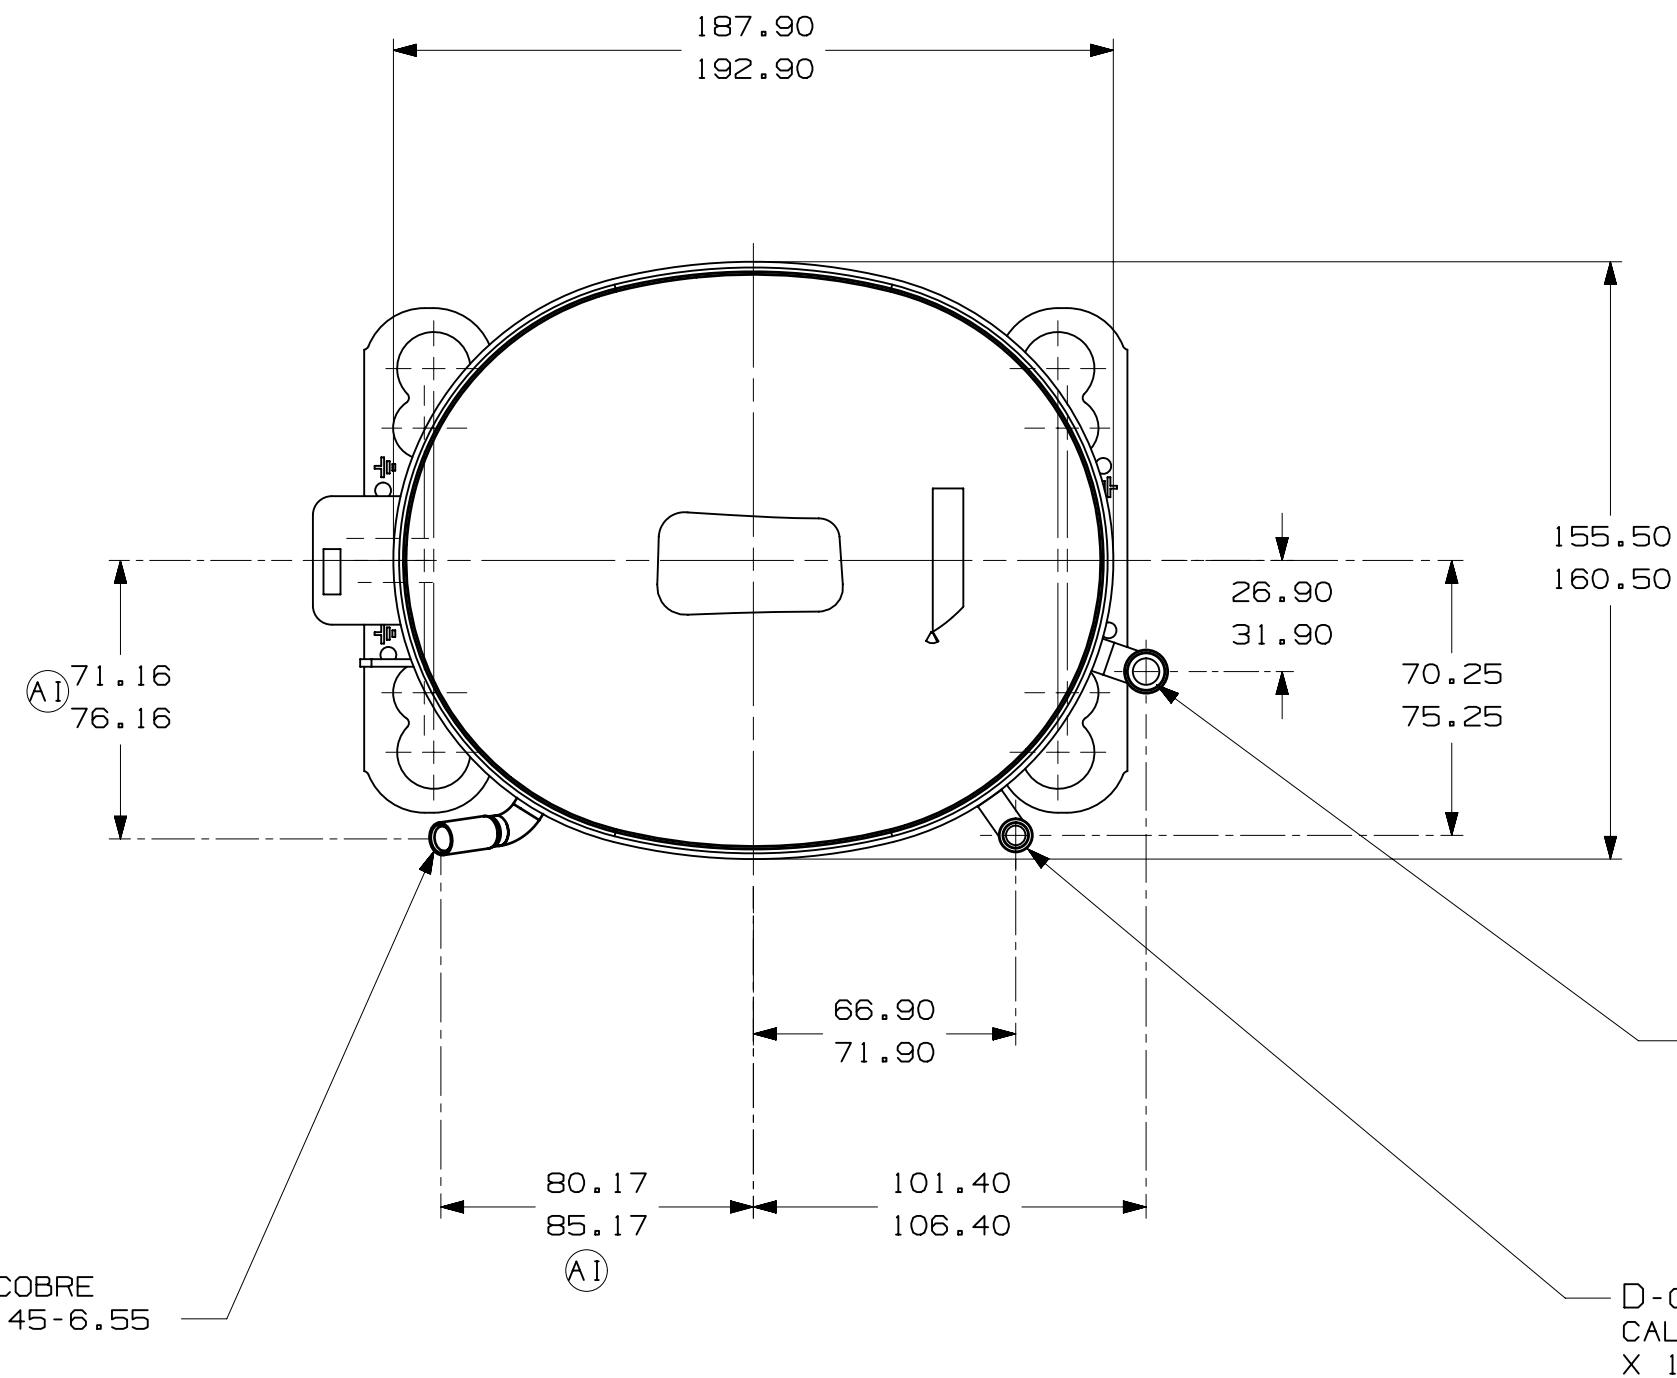



Technical drawing of the front view of a circular mechanical component. The drawing includes the following dimensions and labels:

- Horizontal Dimensions:**
 - Overall width: 169.6
 - Distance from left edge to centerline: 170.6
 - Distance from centerline to right edge: 165.6
 - Distance from centerline to right edge (inner): 164.6
 - Distance from centerline to right edge (inner): 80.30
 - Distance from centerline to right edge (inner): 80.80
- Vertical Dimensions:**
 - Distance from top edge to centerline: 101.3
 - Distance from centerline to bottom edge: 101.7
 - Distance from top edge to centerline (inner): 69.8
 - Distance from centerline to bottom edge (inner): 70.2
- Feature Labels:**
 - AF (Front Flange)
 - AE (Accessories)
 - AH (Accessories)
 - Ø 19.2 (Top Flange)
 - Ø 19.4 (Top Flange)
 - Ø 16.4 (Bottom Flange)
 - Ø 16.6 (Bottom Flange)

C-CONECTOR DE PROCESSO COBRE
CALIBRAR Ø INT. PARA 6.45-6.55
X 15.00-17.00 DE PROF.

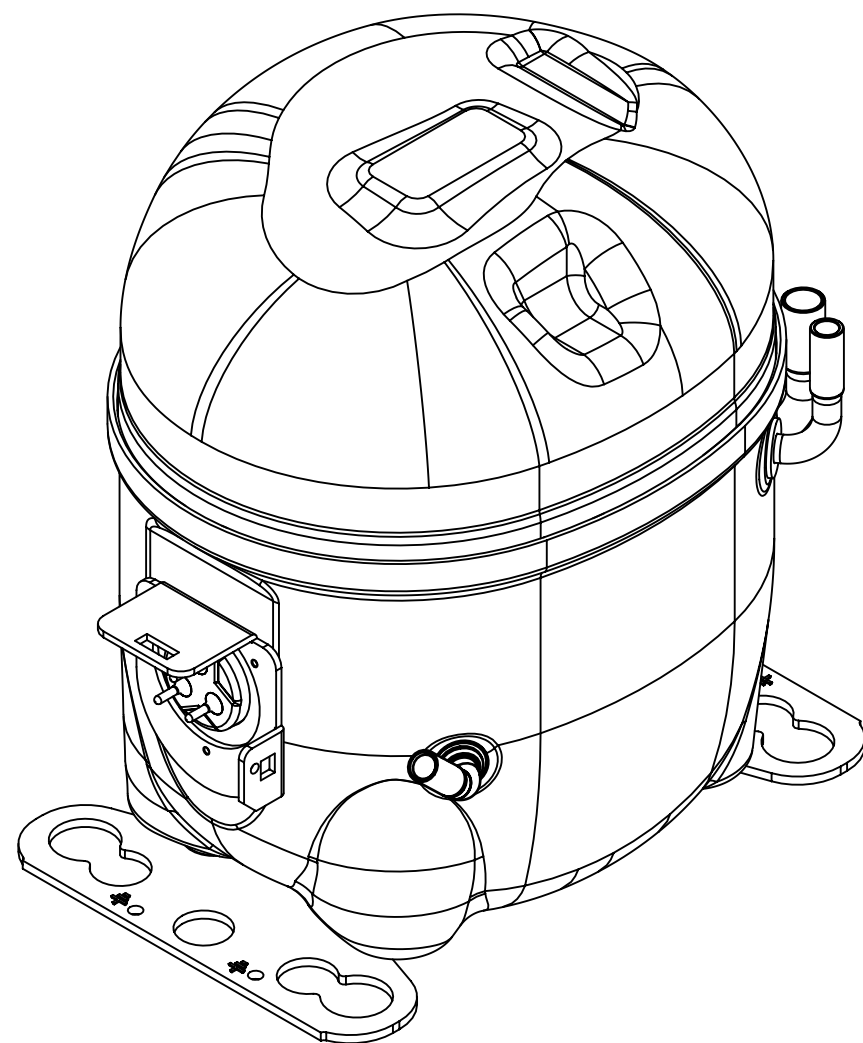

ETIQUETA SERIAL
VER NOTA 5

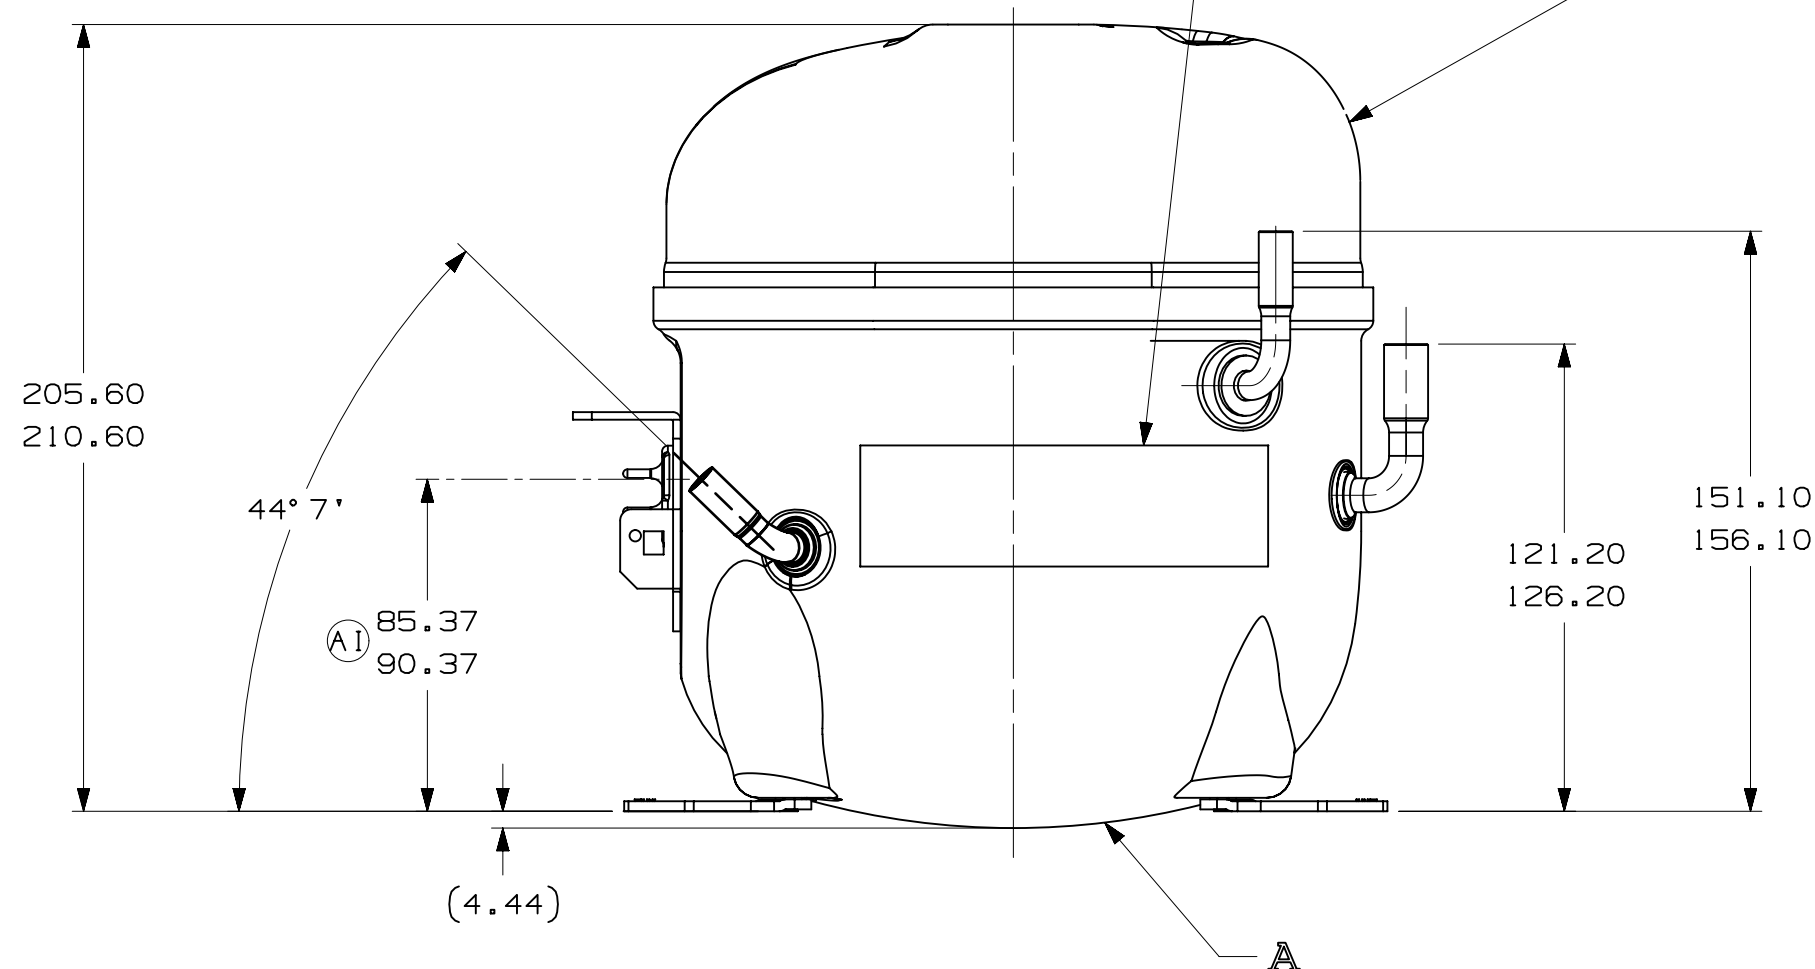

- NOTAS:
- 1- SE ESPECIFICADO NA LISTA DE MATERIAL, MONTAR AS PECAS CONFORME MOSTRADO.
 - 2- VER ESPECIFICACAO "A-B" E "A-C" PARA PROCESSO.
 - 3- NAO PODE HAVER VINCOS NOS TUBOS (VINCOS SAO SINAIS OU MARCAS QUE FICAM EM ALGO QUE SE DOBRA).
 - 4- APÓS AS DOBRAS NOS TUBOS, NAO PODE HAVER REDUCAO DE AREA SUPERIOR A 30%.
 - 5- A ETIQUETA SERIAL DEVE SER DO LADO OPOSTO AO MOSTRADO ACIMA, SOMENTE PARA O MODELO AE1048BR.
 - 6- OS TUBOS DE SUCCAO, DESCARGA E PROCESSO DEVEM ESTAR ISENTOS DE TINTA EM 15,8mm (5/8") A PARTIR DO TOPO DOS TUBOS CONFORME ESPEC. T.P.Co. A-B4.
 - 7- VER ESPECIFICACAO TECUMSEH GLOBAL 8 PARA EXIGENCIAS DE FORNECEDORES REFERENTES A REGULAMENTACOES AMBIENTAIS.

[illegible]