PART NO. DEAE-5

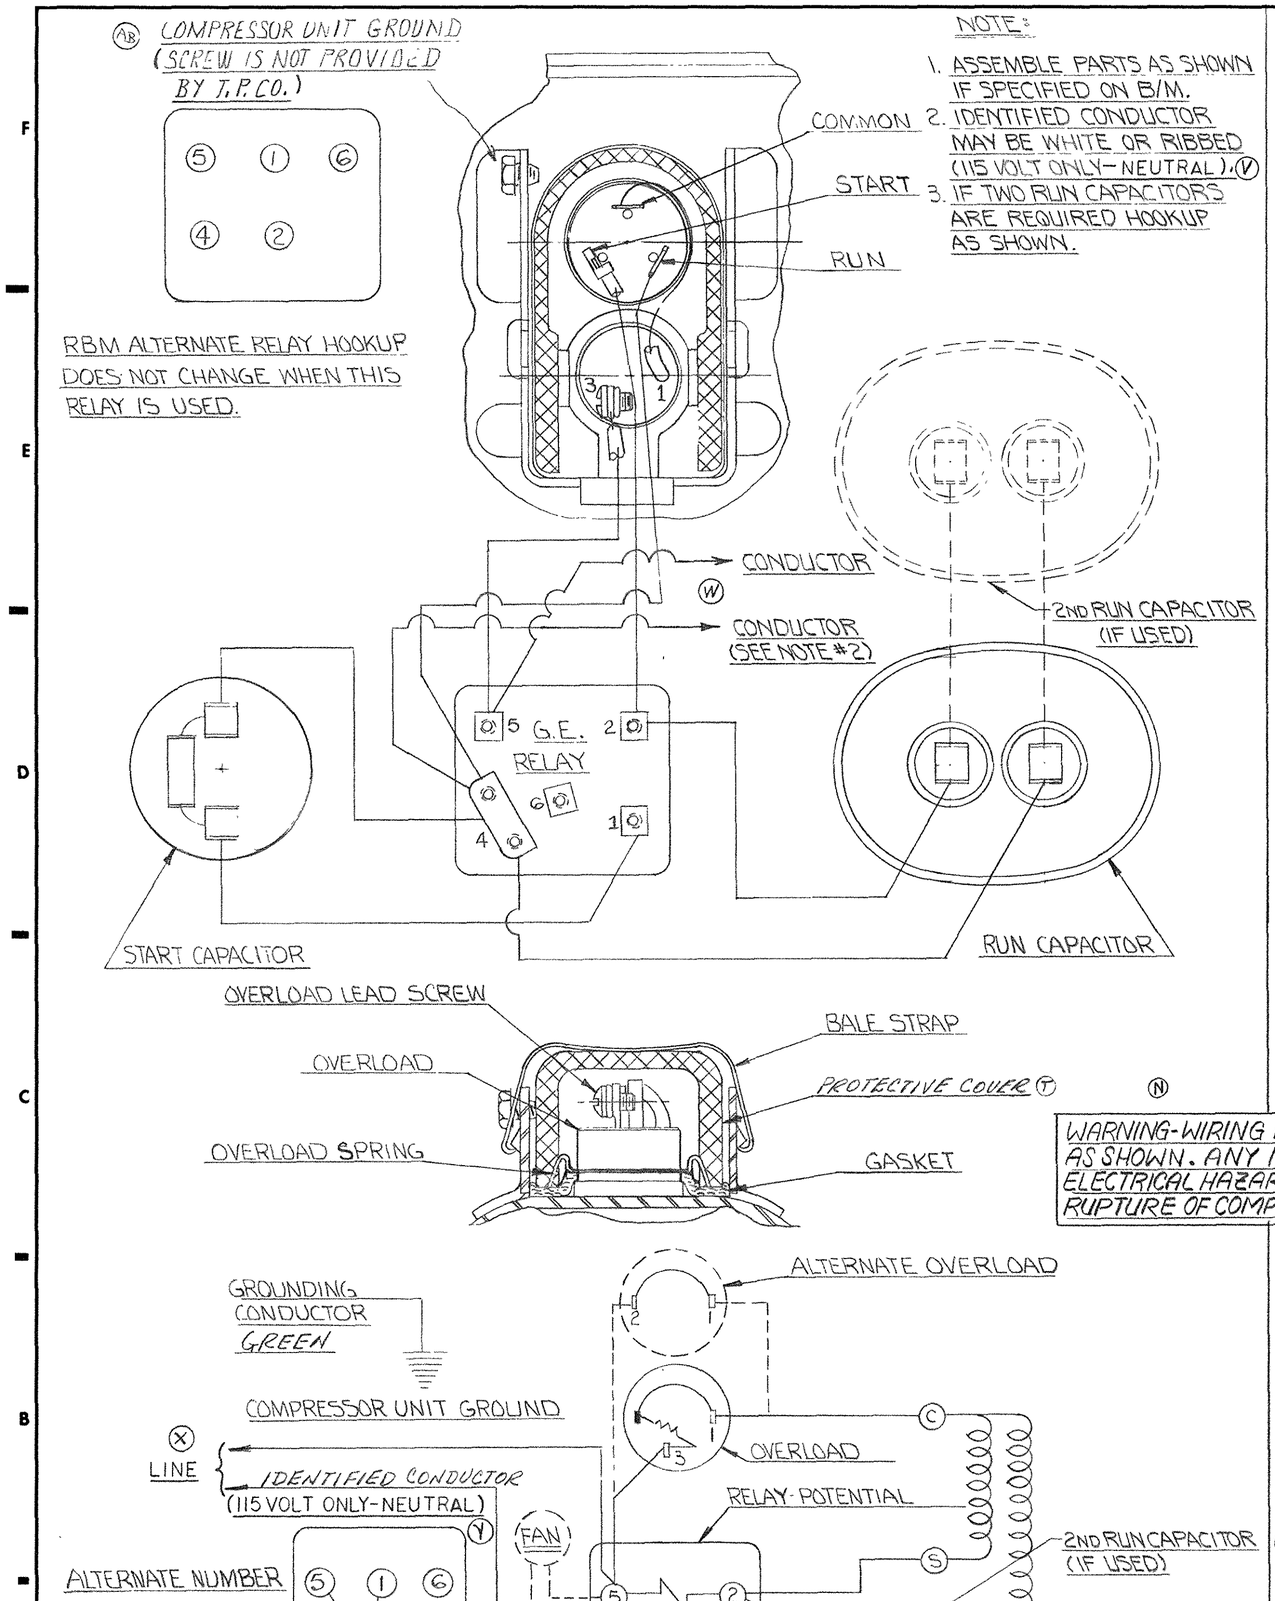

NOTE:

1. ASSEMBLE PARTS AS SHOWN IF SPECIFIED ON B/M.
2. IDENTIFIED CONDUCTOR MAY BE WHITE OR RIBBED (115 VOLT ONLY-NEUTRAL). (V)
3. IF TWO RUN CAPACITORS ARE REQUIRED HOOKUP AS SHOWN.

(Z) 115 OR 230 VOLT-SCHEMATIC WIRING DIAGRAM

CSR OR CSR START CAPACITOR ASSIST

REF. DWG. MD 472-35

(N) WARNING-WIRING DIAGRAM MUST BE FOLLOWED AS SHOWN. ANY MISWIRING CAN CAUSE SERIOUS ELECTRICAL HAZARD AND POTENTIAL DAMAGE OR RUPTURE OF COMPONENT ELECTRICAL PARTS.

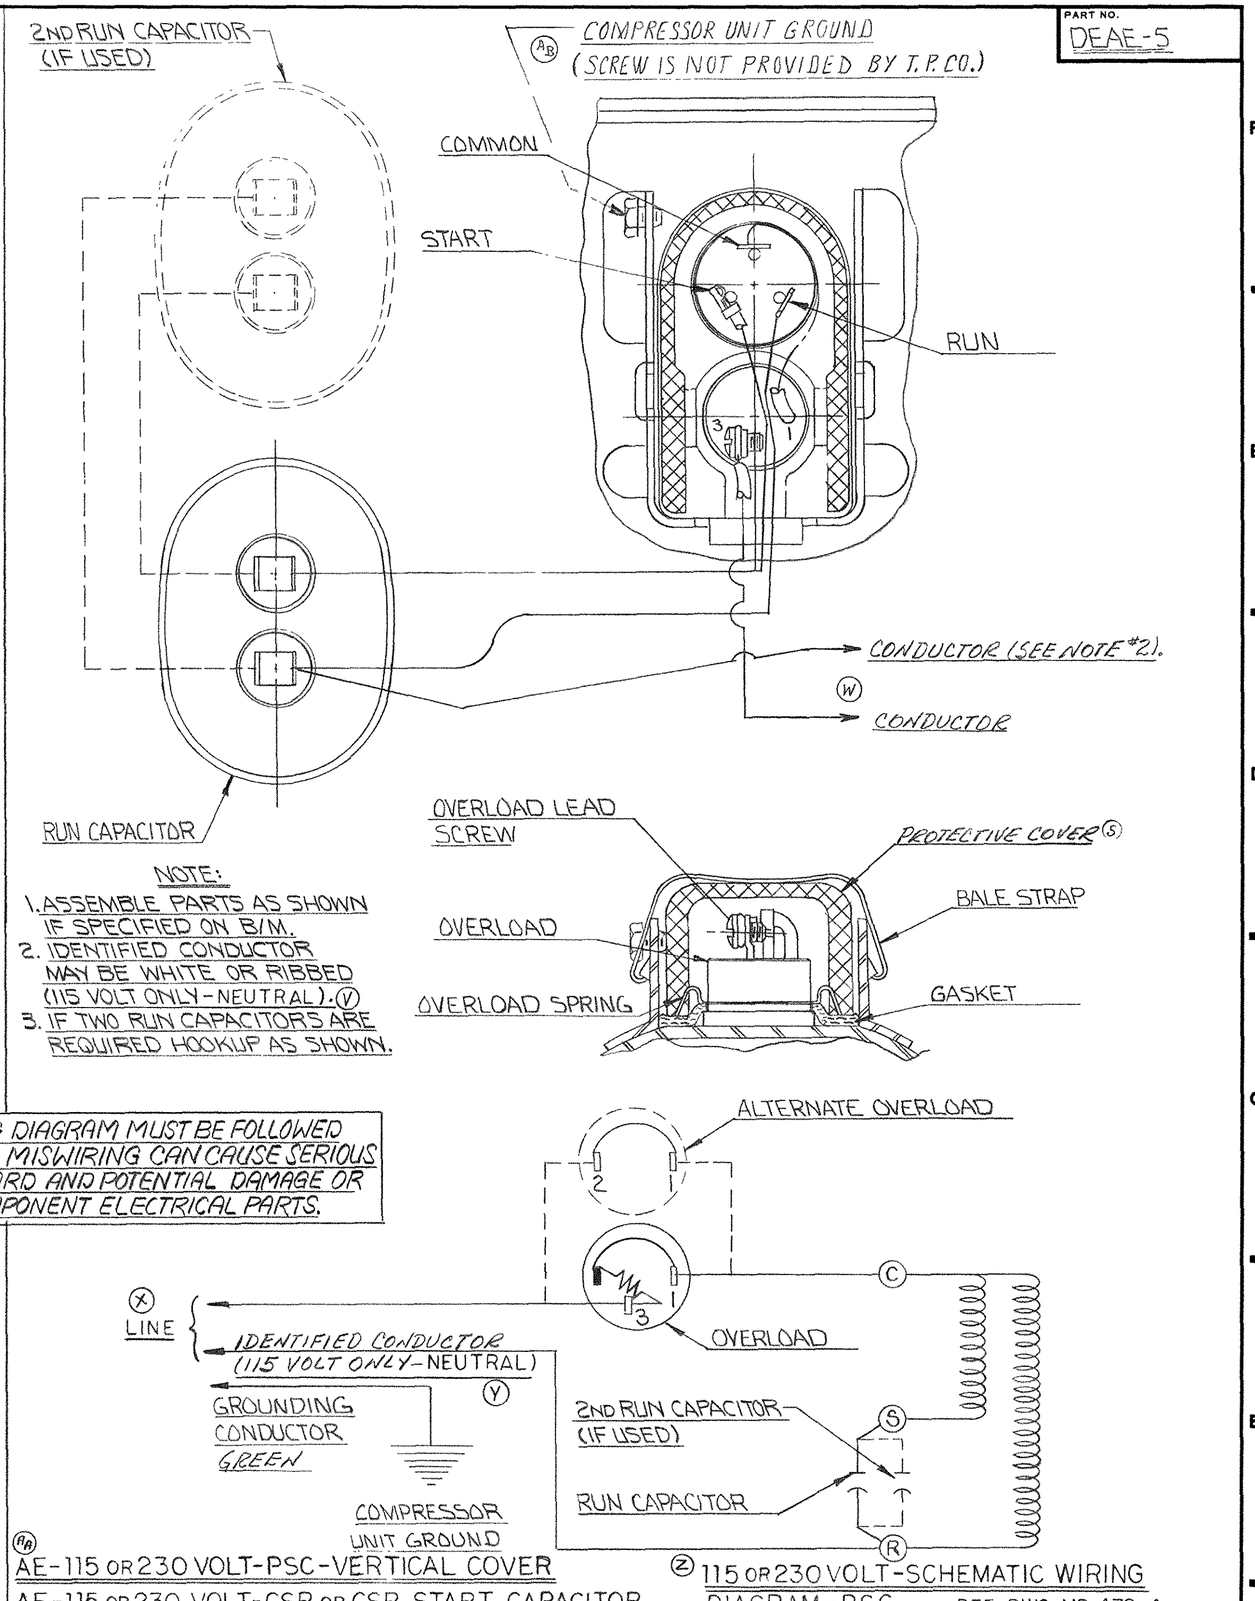

NOTE:

1. ASSEMBLE PARTS AS SHOWN IF SPECIFIED ON B/M.
2. IDENTIFIED CONDUCTOR MAY BE WHITE OR RIBBED (115 VOLT ONLY-NEUTRAL). (V)
3. IF TWO RUN CAPACITORS ARE REQUIRED HOOKUP AS SHOWN.

(AA) AE-115 OR 230 VOLT-PSC-VERTICAL COVER

AE-115 OR 230 VOLT-CSR OR CSR START CAPACITOR

(AA) ASSIST-VERTICAL COVER

(Z) 115 OR 230 VOLT-SCHEMATIC WIRING DIAGRAM-PSC

REF. DWG. MD 472-4

AE

| | | |