



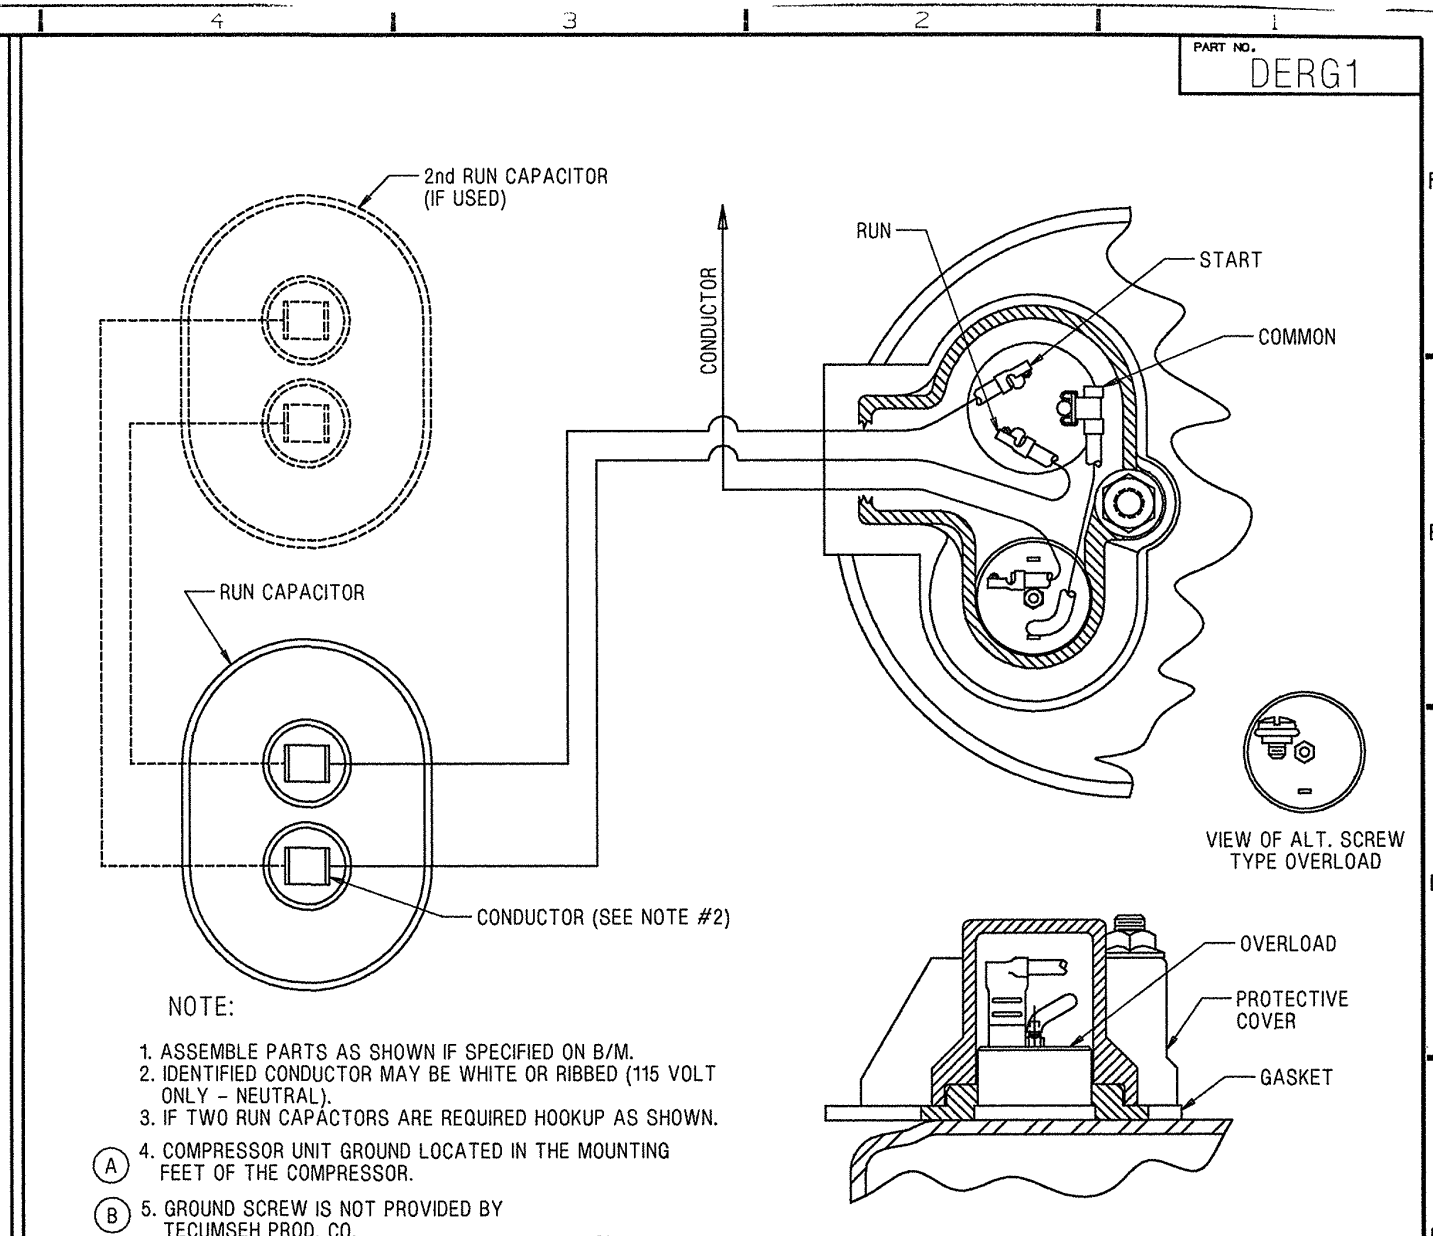

1. ASSEMBLE PARTS AS SHOWN IF SPECIFIED ON B/M.
2. IDENTIFIED CONDUCTOR MAY BE WHITE OR RIBBED (115 VOLT ONLY - NEUTRAL).
3. IF TWO RUN CAPACITORS ARE REQUIRED HOOKUP AS SHOWN.
- (A) 4. COMPRESSOR UNIT GROUND LOCATED IN THE MOUNTING FEET OF THE COMPRESSOR.
- (B) 5. GROUND SCREW IS NOT PROVIDED BY TECUMSEH PROD. CO.

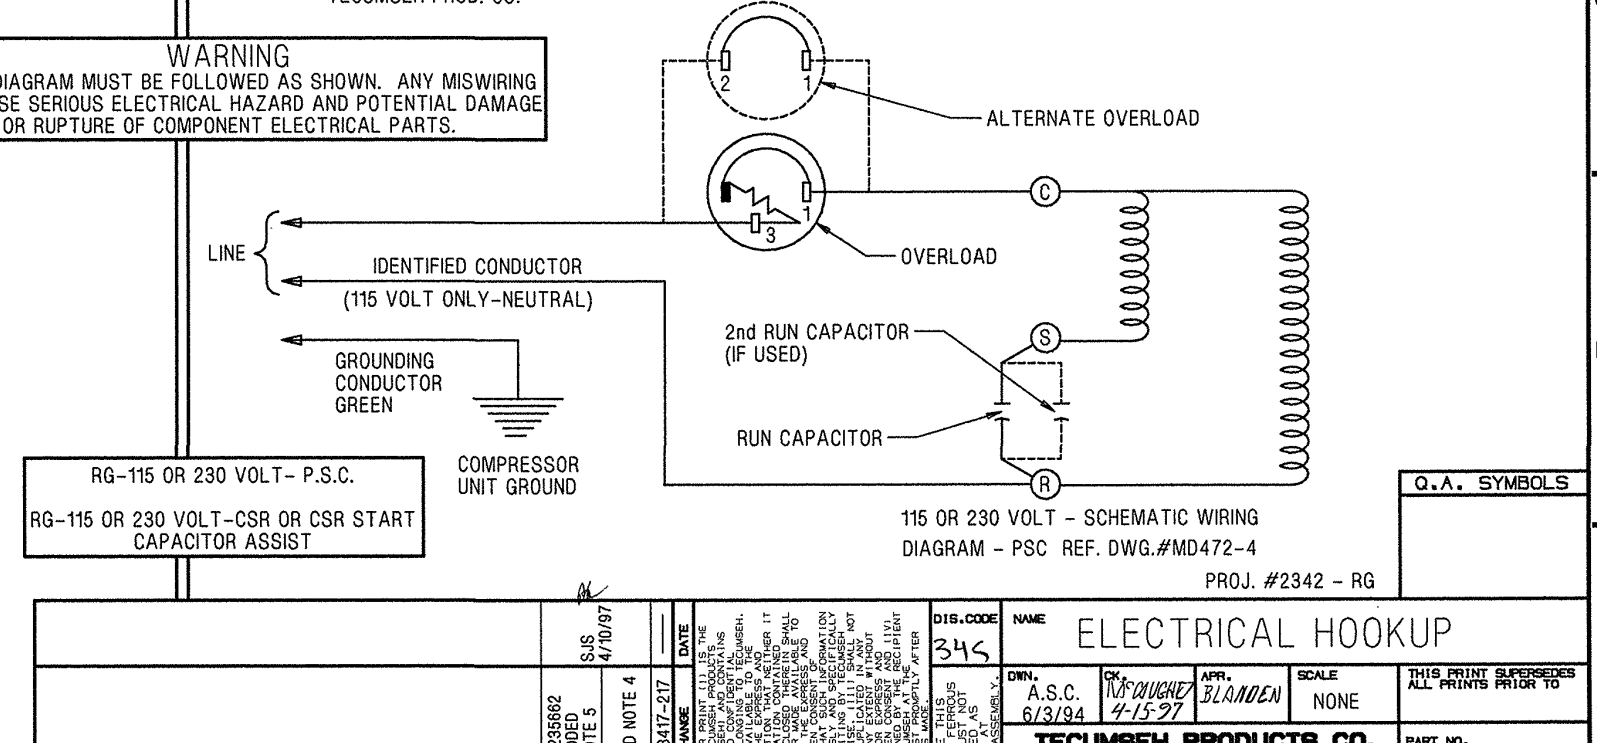

WARNING
 WIRING DIAGRAM MUST BE FOLLOWED AS SHOWN. ANY MISWIRING
 CAN CAUSE SERIOUS ELECTRICAL HAZARD AND POTENTIAL DAMAGE
 OR RUPTURE OF COMPONENT ELECTRICAL PARTS.

WARNING

RG-115 OR 230 VOLT- P.S.C.
RG-115 OR 230 VOLT-CSR OR CSR START
CAPACITOR ASSIST

115 OR 230 VOLT - SCHEMATIC WIRING
DIAGRAM - PSC REF. DWG.#MD472-4

PROJ. #2342 - RG

Q.A. SYMBOLS

ELECTRICAL HOOKUP

DWN.	CK.	APR.	SCALE
A.S.C.	MS DOUGHER	B L A N D E N	NONE
6/3/94	4-15-97		

TECUMSEH PRODUCTS CO.
TECUMSEH, MICHIGAN

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50
1	2	3	4	5																																													

U.S. GOVERNMENT PRINTING OFFICE: 1964 O - 348-144

PART NO.

DERG1

REF. DWG. #MD472-35

115 OR 230 VOLT - SCHEMATIC WIRING DIAGRAM CSR OR CSR START CAPACITOR ASSIST