



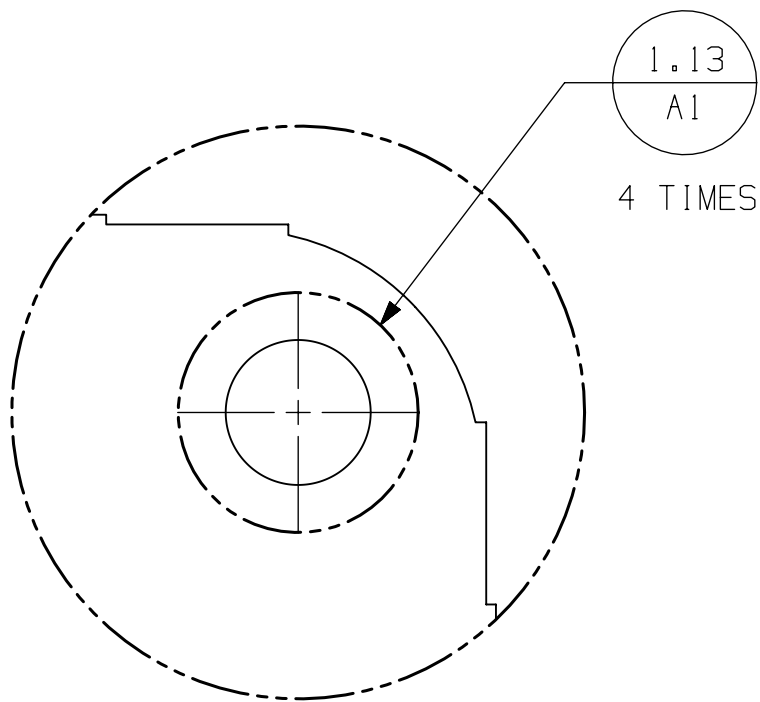

DETAIL C

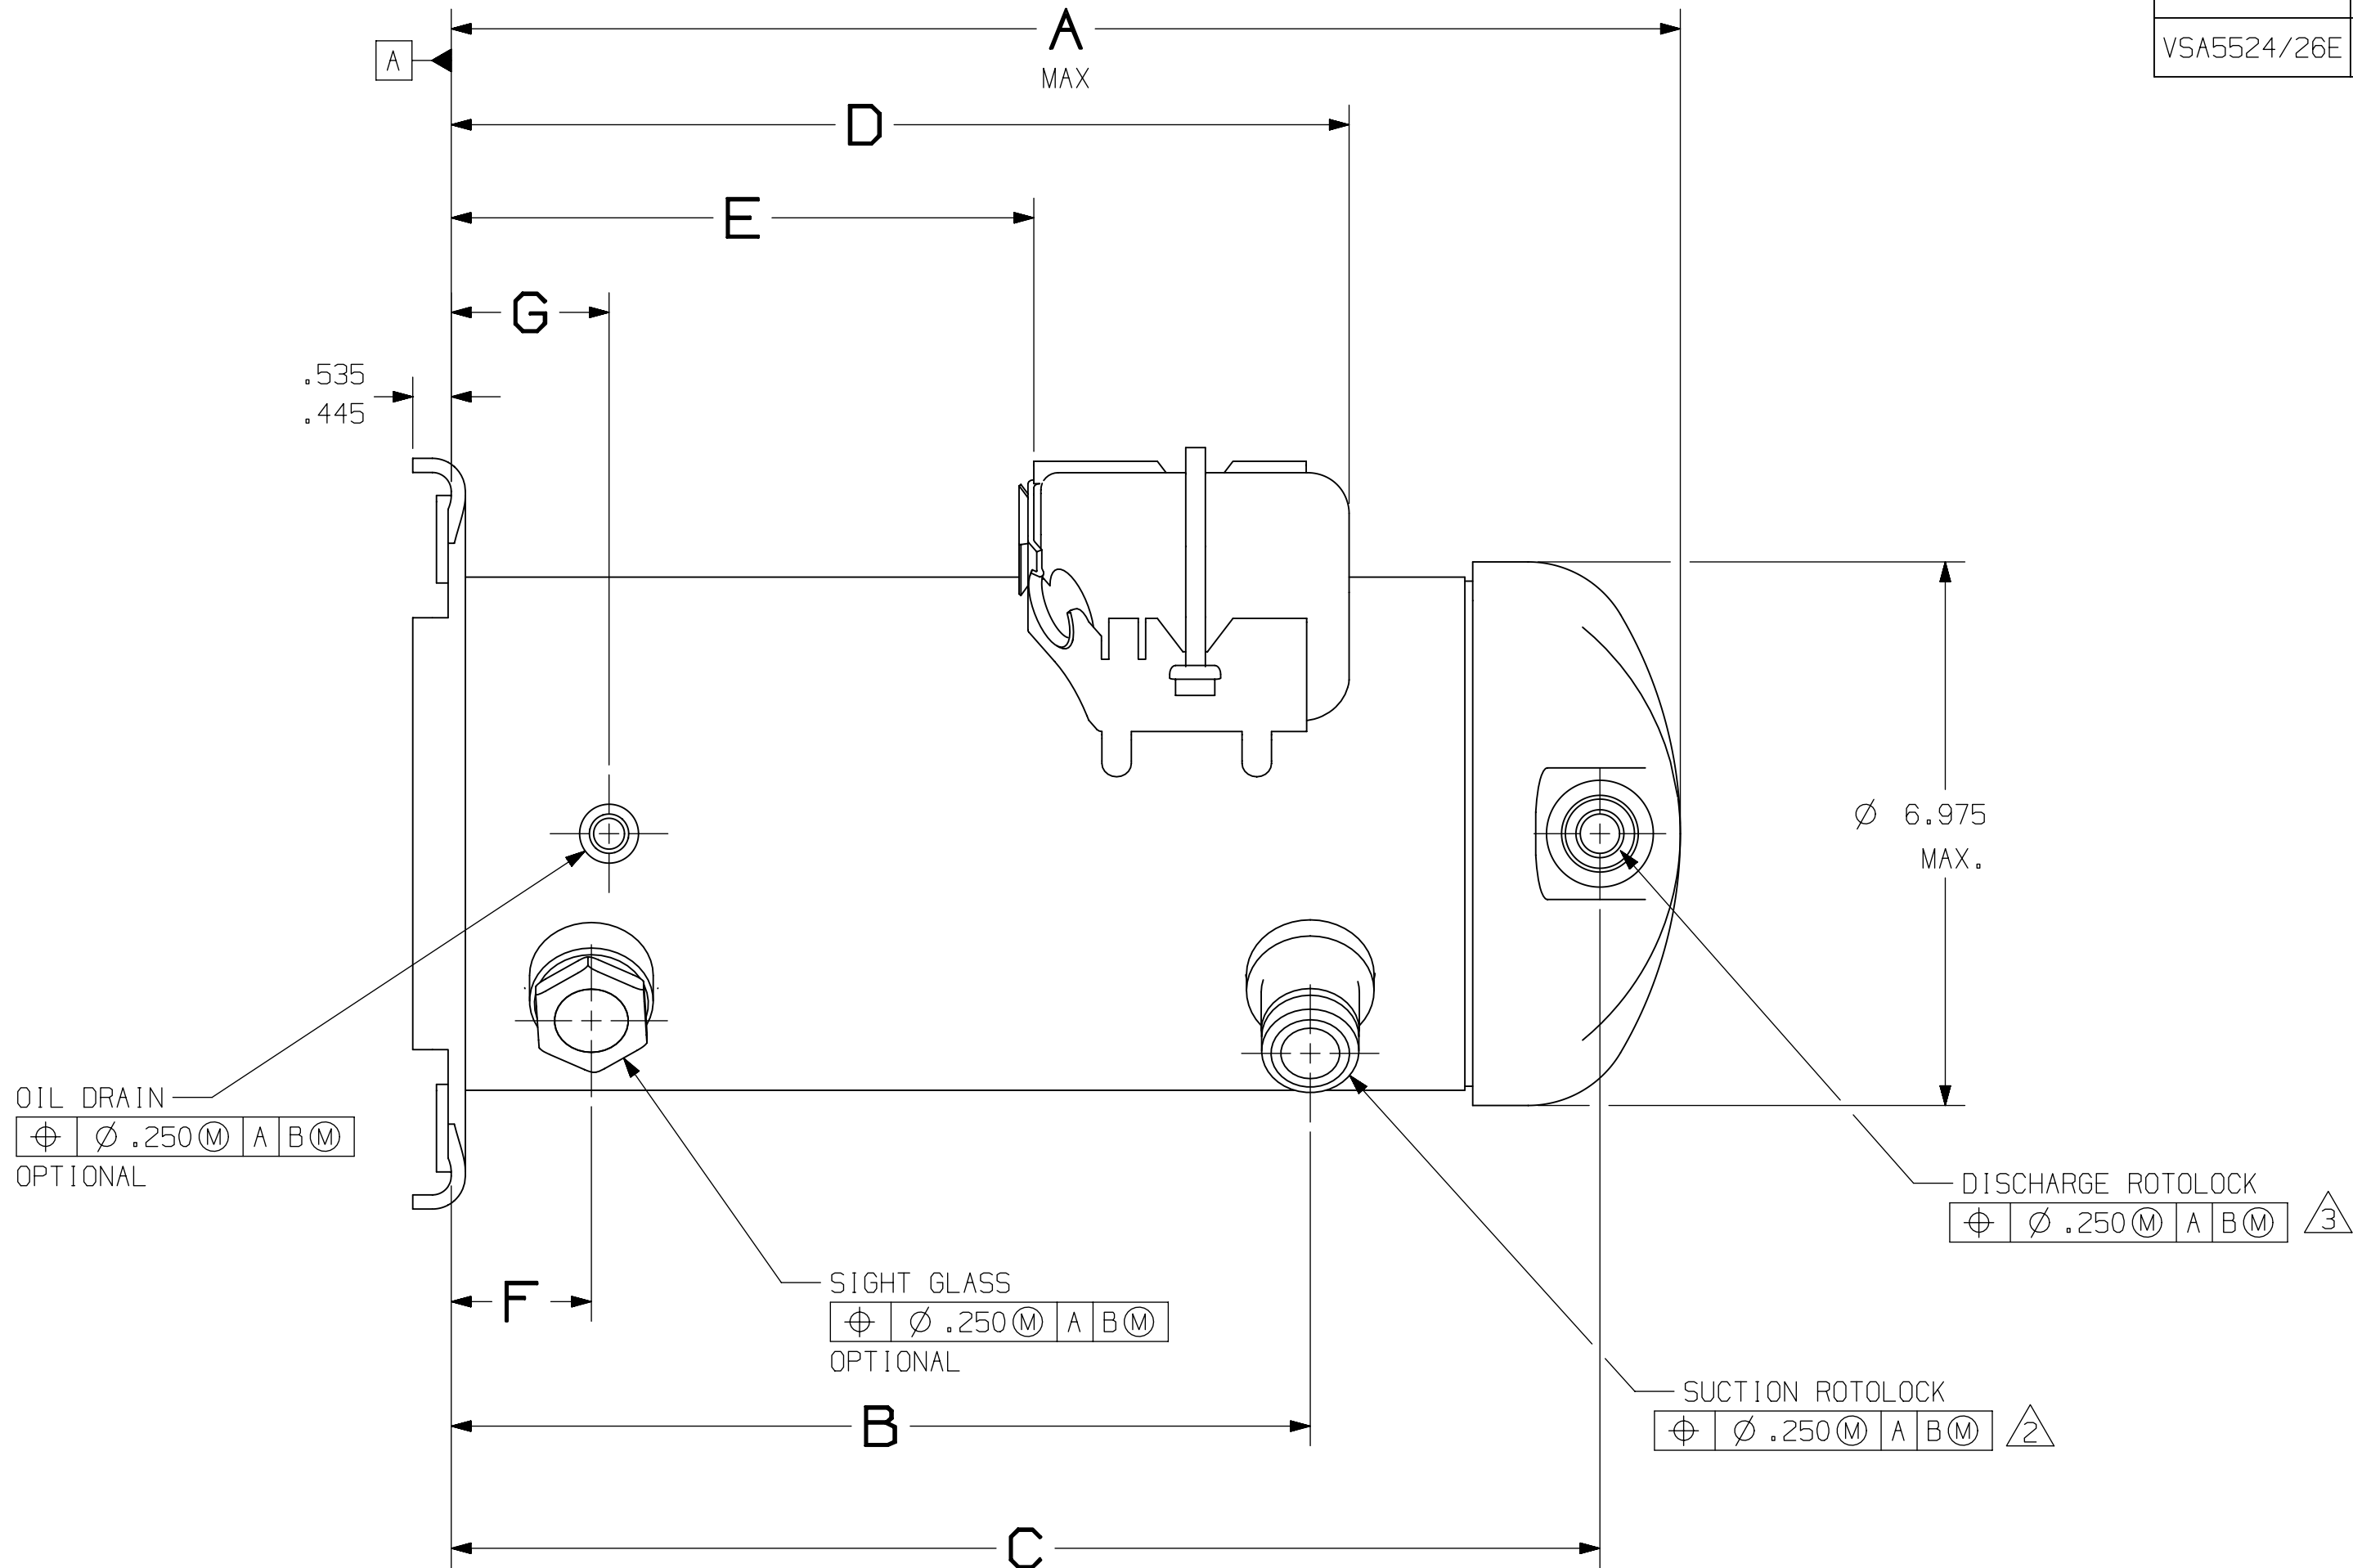

NOTES:

1. DIMENSIONS TOL ± .06 UNLESS OTHERWISE SPECIFIED.

2. SUCTION ROTOLock STEEL (I.D. .760-.740) 1-1/4"-12 UNF 2A THREAD.

3. DISCHARGE ROTOLock STEEL (I.D. .505-.495) 1"-14 UNF 2A THREAD.


4. SUCTION ROTOLock = 0.967-0.847

5. DISCHARGE ROTOLock = 0.880-0.760

6. COMPRESSOR OPENINGS MUST BE PLUGGED.

7. MUST COMPLY WITH T.C.Co. GLOBAL SPEC 08.

MODEL	VOLTAGE CODE	A MAX	B	C	D	E	F	G
V5A9490Z	XT / XG	14.250	9.641	13.330	110.136	6.120	1.705	1.930
V5A9490Z	NA	15.433	10.410	14.410	111.216	7.200	1.785	2.010
V5A9510Z	XT / XG	14.250	9.641	13.330	110.136	6.120	1.705	1.930
V5A9510Z	NA / XC	15.433	10.410	14.410	111.216	7.200	1.785	2.010
V5A9512Z	XT / XG	14.250	9.641	13.330	110.136	6.120	1.705	1.930
V5A9512Z	NA / XC	15.433	10.410	14.410	111.216	7.200	1.785	2.010
V5A9514Z	XT / XG	14.250	9.641	13.330	110.136	6.120	1.705	1.930
V5A9514Z	XC	15.433	10.410	14.410	111.216	7.200	1.785	2.010
V5A9514Z	NA	15.650	10.941	14.631	111.436	7.420	1.785	2.010
V5A9517Z	XG / XT / XC	15.433	10.410	14.410	111.216	7.200	1.785	2.010
V5A9517Z	NA	15.650	10.941	14.631	111.436	7.420	1.785	2.010
V5A9521Z	XT / XG / XC	15.433	10.410	14.410	111.216	7.200	1.785	2.010
V5A9521Z	NA	15.650	10.941	14.631	111.436	7.420	1.785	2.010
V5A9524Z	XT / TB / XG	15.650	10.941	14.631	111.436	7.420	1.785	2.010
V5A5524/26E	NA	15.650	10.941	14.631	111.436	7.420	NA	NA

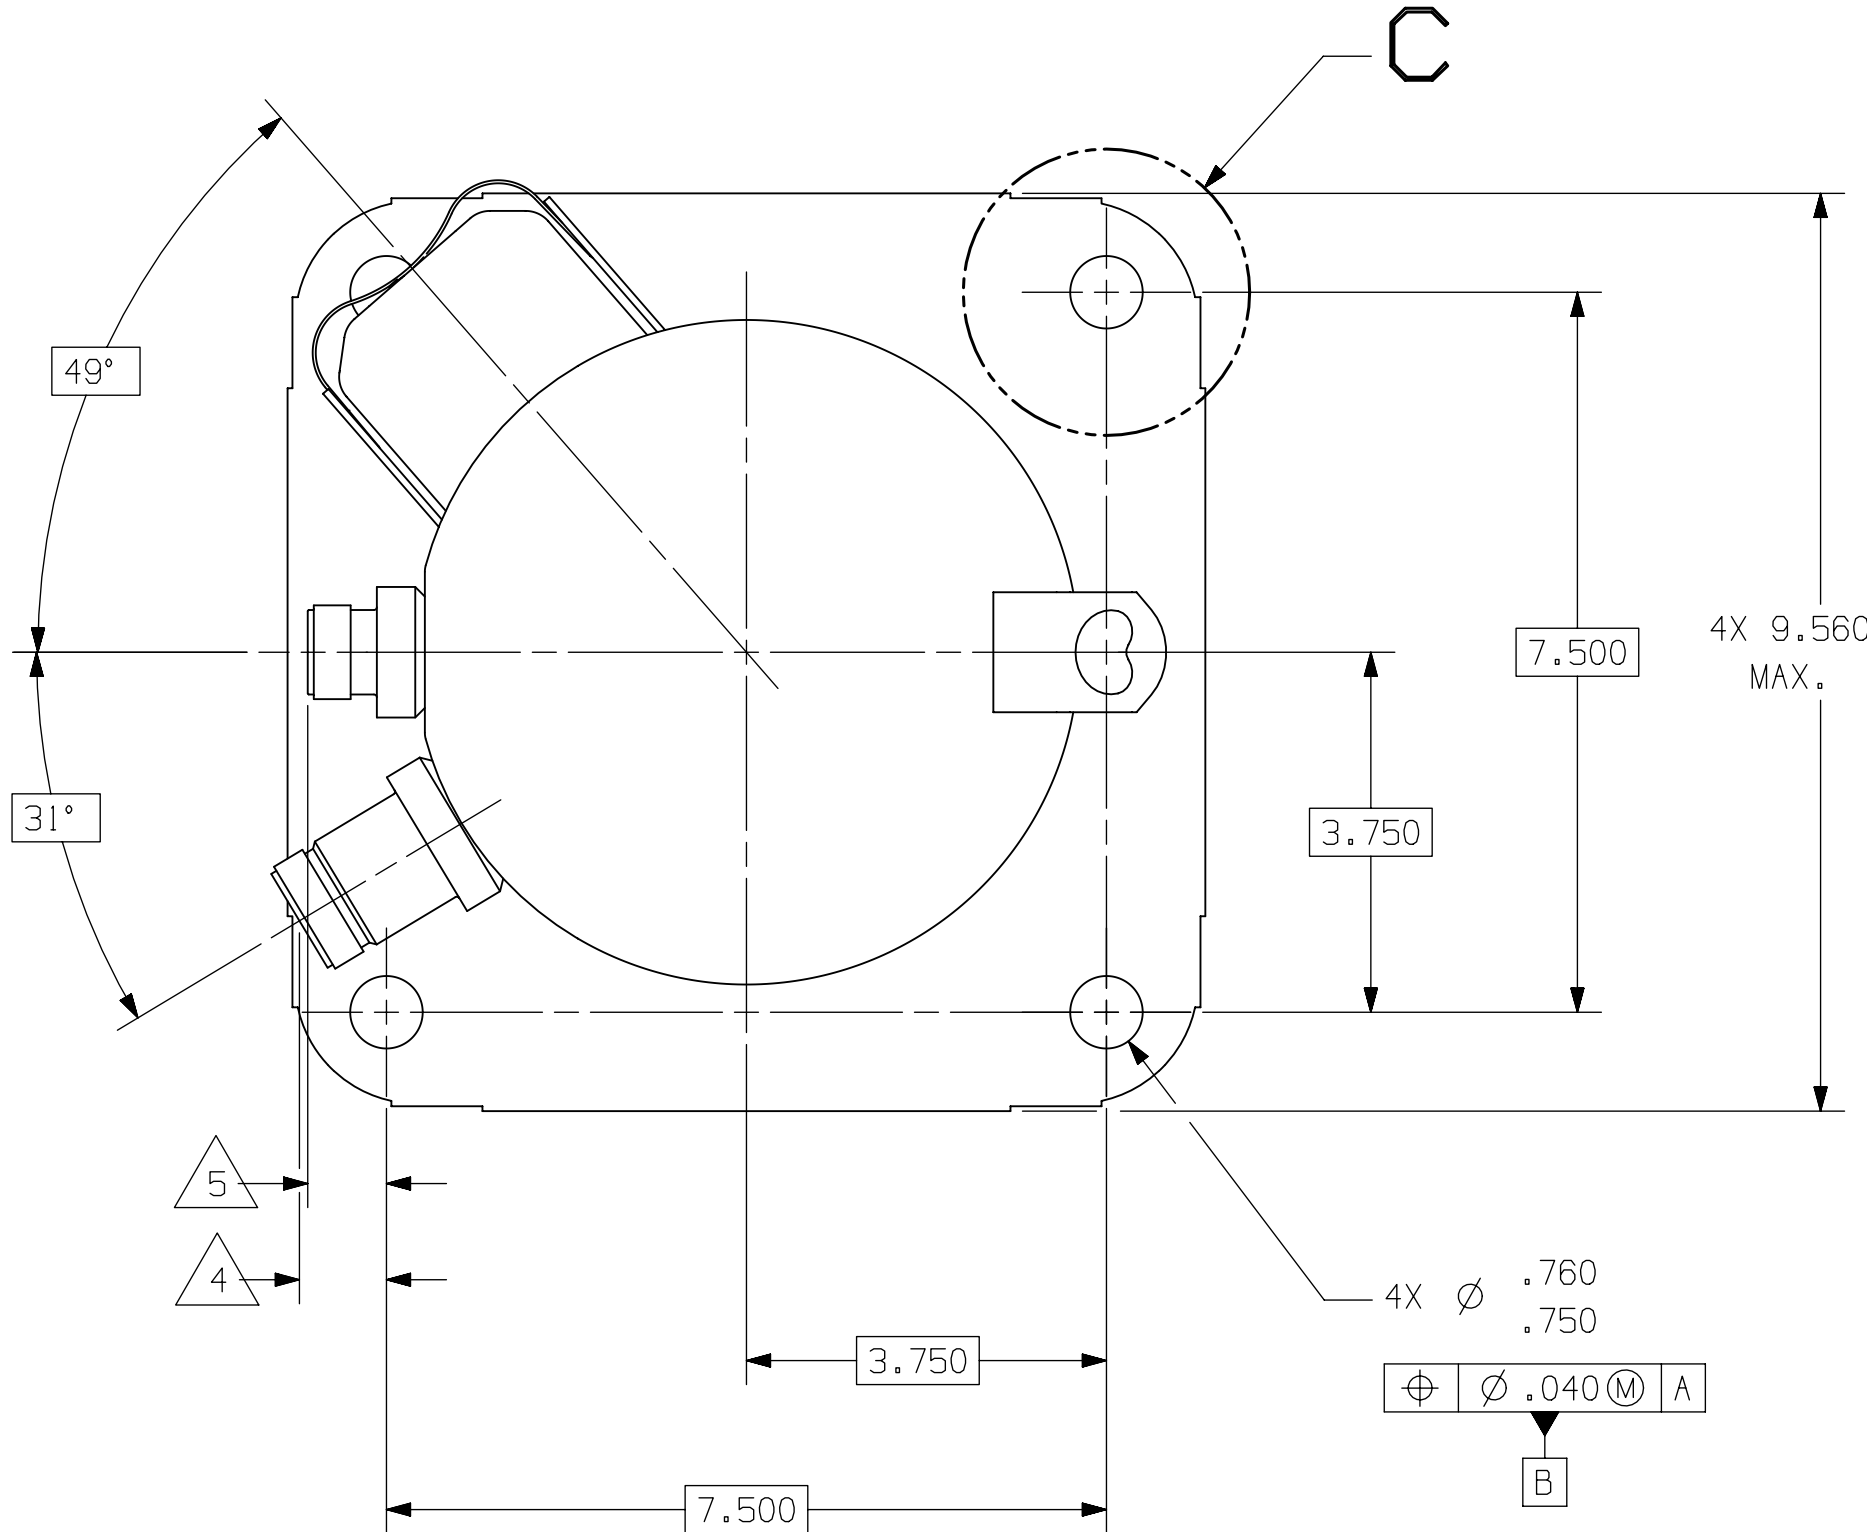

ENGLISH

Q.A. SYMBOLS

★ = CATEGORY I

▲ = CATEGORY II

■ = CATEGORY III

VS = CATEGORY IV

SALES COMPRESSOR

TECOMCO PRODUCTS CO.
TECOMCO, MICHIGAN

NOTED

DRAWING NO.

DCVS003